


BFM[®] TAPERED CONNECTORS

Large DIA.	TAPERED CONNECTOR MINIMUM LENGTH (CL) PER DIAMETERS												
	550	500	450	400	350	300	250	200	150	100	x	100	150
650	550	500	450	400	350	300	250	200	150	100	x	100	150
600	500	450	400	350	300	250	200	150	100	x	100	150	200
550	450	400	350	300	250	200	150	100	x	100	150	200	250
500	400	350	300	250	200	150	100	x	100	150	200	250	300
450	350	300	250	200	150	100	x	100	150	200	250	300	350
400	300	250	200	150	100	x	100	150	200	250	300	350	400
350	250	200	150	100	x	100	150	200	250	300	350	400	450
300	200	150	100	x	100	150	200	250	300	350	400	450	500
250	150	100	x	100	150	200	250	300	350	400	450	500	550
200	100	x	100	150	200	250	300	350	400	450	500	550	600
150	x	100	150	200	250	300	350	400	450	500	550	600	650
125	x	100	150	200	250	300	350	400	450	500	550	600	650
100	x	100	150	200	250	300	350	400	450	500	550	600	650
Small DIA.	100	125	150	200	250	300	350	400	450	500	550	600	650

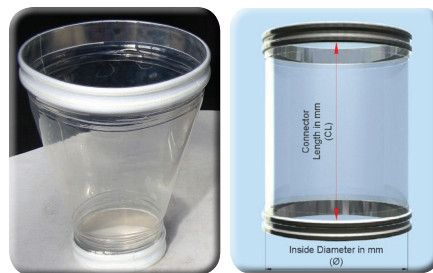

Example: A tapered connector measuring **350mm** diameter x **125mm** diameter has a minimum connector length of **250mm**.