




CP-AP

Medium weight coextruded thermoplastic ether based polyurethane hose with a rigid external ABS helix

LENGTHS	SIZES	COLORS	TEMPERATURE RANGE
12 AND 25 FEET (AVAILABLE IN 100' LENGTHS UP TO 6" ID.)	.75" - 12" *	CLEAR WITH YELLOW HELIX	-40° TO 200° F -40° TO 93° C

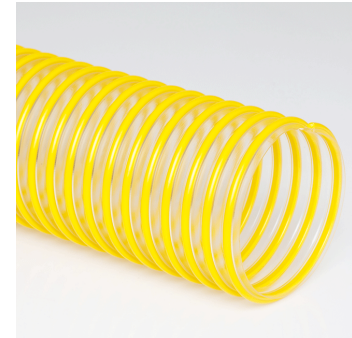

APPLICATIONS

- Ultra smooth interior assures efficient airflow
- Great abrasion resistance
- Excellent wear performance
- Puncture and tear resistant with high tensile strength
- Good low temperature flexibility
- Cuffs available
- Crush resistant
- Spiral co-extruded engineered construction
- Helix acts as a wear strip
- Excellent hydrolysis and microbial resistance
- Wall thickness = .032"-.040"



INSIDE DIAMETER (IN)	APPROX. WEIGHT (LBS/FT)	WALL THICKNESS (IN)	CL BEND RADIUS (IN)	COMPRESSION RATIO	NEGATIVE PRESSURE (IN/HG)	WORKING PRESSURE (PSI)
.75	.09	.02	1	1.7:1	29	55
1	.13	.022	1.4	1.8:1	29	50
2	.34	.032	2.8	1.5:1	28	37
3	.46	.033	3.7	1.7:1	26	32
4	.75	.033	6	1.5:1	20	28
5	.83	.033	5.5	2:1	16	23
6	.92	.035	6.5	2:1	10	24
7	1.16	.035	7.5	2:1	9	21
8	1.32	.035	8.5	2:1	8	22
9	1.53	.04	9.25	2:1	7	20
10	1.65	.04	9.5	2.25:1	6	16
12	2.2	.04	10	3:1	5	10

* FURTHER DIAMETERS AND LENGTHS AVAILABLE ON REQUEST.



SCAN FOR PRODUCT INFORMATION

DISCLAIMER: THE DATA PROVIDED IS INTENDED AS A GUIDE ONLY AND SHOULD NOT BE INTERPRETED AS A WARRANTY. IT IS NOT INTENDED TO BE USED TO DETERMINE THE SUITABILITY OF THE PRODUCT FOR ANY SPECIFIC CUSTOMER APPLICATION. SIFTEX STRONGLY SUGGESTS THAT EACH CUSTOMER THOROUGHLY TEST THE PROSPECTIVE PRODUCT IN THEIR OWN MANUFACTURING FACILITY TO DETERMINE THE ACTUAL SUITABILITY OF THE PRODUCT IN THEIR SPECIFIC APPLICATION.

