



CP-HT


High-temperature hose, clamp profile hose (clip hose), double-layer (up to +1,292°F)

LENGTHS	SIZES	COLORS	TEMPERATURE RANGE
25'	3" TO 40"*	LIGHT GREY	-75°F TO 1,100°F SHORT TIME TO 1,300°F

APPLICATIONS

- flexible hose/ ducting for hot and cold gases
- vehicle gas exhaust system, car gas extraction: hose reel, slotted floor channel, underfloor extraction system
- engine test bench, exhaust gas measurement
- high temperature extraction: oven, foundry, furnace, smelting, ceramics industry, glass industry, steel plant, aluminium mill
- bellows, compensators

I.D. IN / MM	O.D. IN	UNDER-PRESSURE INHG	BENDING RADIUS IN	WEIGHT LBS./FT
3 / 75-76	3.50	8.55	1.67	1.245
4 / 100-102	4.49	4.45	2.09	1.410
5 / 125-127	5.47	2.95	2.46	1.745
6 / 150-152	6.46	1.75	2.87	1.420
7 / 178-180	7.64	1.50	3.35	1.695
8 / 200-203	8.43	1.20	3.66	1.875
9 / 228-229	9.53	0.90	4.09	2.130
10 / 254	10.55	0.90	4.51	2.370
11 / 280	11.57	0.75	4.90	2.605
12 / 305	12.56	0.60	5.31	2.830

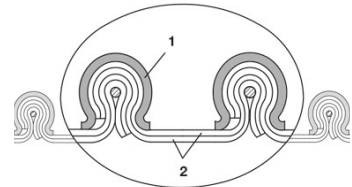

CP CONSTRUCTION

- Clamp profile supporting spiral: all-stainless steel
- Double-layer wall; wall: interior and exterior stainless steel wire reinforced and special coated glass fabric

* FURTHER DIAMETERS AND LENGTHS AVAILABLE ON REQUEST.



SCAN FOR PRODUCT INFORMATION

DISCLAIMER: THE DATA PROVIDED IS INTENDED AS A GUIDE ONLY AND SHOULD NOT BE INTERPRETED AS A WARRANTY. IT IS NOT INTENDED TO BE USED TO DETERMINE THE SUITABILITY OF THE PRODUCT FOR ANY SPECIFIC CUSTOMER APPLICATION. SIFTEX STRONGLY SUGGESTS THAT EACH CUSTOMER THOROUGHLY TEST THE PROSPECTIVE PRODUCT IN THEIR OWN MANUFACTURING FACILITY TO DETERMINE THE ACTUAL SUITABILITY OF THE PRODUCT IN THEIR SPECIFIC APPLICATION.

