



Hi-Flex Fabric Hoses


CP-PTFE

Superior chemical and temperature resistant hose for food and pharmaceutical use.

LENGTHS	SIZES	COLORS	TEMPERATURE RANGE
25'	2" TO 40"*	LIGHT BROWN	240°F TO 480°F SHORT TIME TO 520°F

APPLICATIONS

- flexible hose/ ducting for hot and cold gases and for dust, powder, fibres
- food industry, pharmaceutical industry: food stuff, pharmaceutical
- mixer, dryer, packaging machine, bulk-bag (big bag)-charging and discharging, mill
- extraction arm
- chemical industry: chemical vapours, vapour return hose at loading arm, paint steam, spray mist extraction
- paper mill, paper and pulp industry: waste water, air extraction conveying, feedstuff plant, animal feed transport

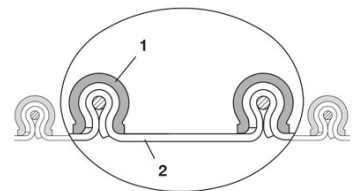

CP CONSTRUCTION

- Clamp profile supporting spiral: all-stainless steel
- Wall: PTFE coated glass fabric

I.D. IN / MM	O.D. IN	OVER-PRESSURE PSI	UNDER-PRESSURE INHG	BENDING RADIUS IN	WEIGHT LBS./FT
2 / 50-51	2.44	12.40	7.95	0.71	0.385
3 / 75-76	3.43	9.75	4.70	0.93	0.550
4 / 100-102	4.41	5.60	2.50	1.10	0.550
5 / 125-127	5.39	4.85	1.75	1.32	0.685
6 / 150-152	6.38	3.10	1.05	1.50	0.510
7 / 178-180	7.56	2.65	0.75	1.73	0.605
8 / 200-203	8.35	2.50	0.60	1.89	0.670
9 / 228-229	9.45	2.35	0.60	2.13	0.765

* FURTHER DIAMETERS AND LENGTHS AVAILABLE ON REQUEST.



SCAN FOR PRODUCT INFORMATION

DISCLAIMER: THE DATA PROVIDED IS INTENDED AS A GUIDE ONLY AND SHOULD NOT BE INTERPRETED AS A WARRANTY. IT IS NOT INTENDED TO BE USED TO DETERMINE THE SUITABILITY OF THE PRODUCT FOR ANY SPECIFIC CUSTOMER APPLICATION. SIFTEX STRONGLY SUGGESTS THAT EACH CUSTOMER THOROUGHLY TEST THE PROSPECTIVE PRODUCT IN THEIR OWN MANUFACTURING FACILITY TO DETERMINE THE ACTUAL SUITABILITY OF THE PRODUCT IN THEIR SPECIFIC APPLICATION.

