

# CP-XT

High-temperature hose, clamp profile hose (clip hose), multi-layer, insulating (up to 2,012°F)


LENGTHS	SIZES	COLORS	TEMPERATURE RANGE
25', 50'	2" TO 40"*	LIGHT GREY	-75°F TO 1,650°F SHORT TIME TO 2,000°F

## APPLICATIONS

- flexible hose/ducting for hot and cold gases
- vehicle gas exhaust system, car gas extraction: hose reel, slotted floor channel, underfloor extraction system
- engine test bench, exhaust gas measurement

- high temperature extraction: oven, foundry, furnace, smelting, ceramics industry, glass industry, steel plant, aluminium mill
- bellows, compensators

I.D. IN / MM	O.D. IN	OVER-PRESSURE PSI	UNDER-PRESSURE INHG	BENDING RADIUS IN	WEIGHT LBS./FT
4 / 100-102	4.49	3.85	5.30	2.52	1.880
5 / 125-127	5.47	3.25	3.55	3.01	2.305
6 / 150-152	6.46	2.05	2.20	3.50	2.065
7 / 178-180	7.64	1.75	1.60	4.09	2.455
8 / 200-203	8.43	1.75	1.35	4.49	2.710
9 / 228-229	9.53	1.60	1.20	5.04	3.070
10 / 254	10.55	1.20	1.05	5.55	3.405
11 / 280	11.57	1.20	0.90	6.06	3.740
12 / 305	12.56	1.05	0.75	6.56	4.040
13 / 330	13.54	0.90	3.70	7.05	4.450
14 / 356	14.57	0.75	0.45	7.56	4.695

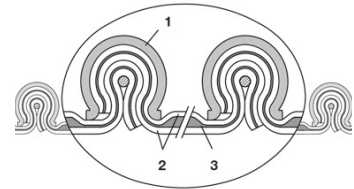

## CP CONSTRUCTION

- Clamp profile supporting spiral: all-stainless steel.
- Multi-layer hose wall; wall: interior stainless steel wire reinforced and special coated glass fabric, thermo-insulation fabric, exterior special coated glass fabric
- Special thermal insulation layer

\* FURTHER DIAMETERS AND LENGTHS AVAILABLE ON REQUEST.



SCAN FOR PRODUCT INFORMATION

**DISCLAIMER:** THE DATA PROVIDED IS INTENDED AS A GUIDE ONLY AND SHOULD NOT BE INTERPRETED AS A WARRANTY. IT IS NOT INTENDED TO BE USED TO DETERMINE THE SUITABILITY OF THE PRODUCT FOR ANY SPECIFIC CUSTOMER APPLICATION. SIFTEX STRONGLY SUGGESTS THAT EACH CUSTOMER THOROUGHLY TEST THE PROSPECTIVE PRODUCT IN THEIR OWN MANUFACTURING FACILITY TO DETERMINE THE ACTUAL SUITABILITY OF THE PRODUCT IN THEIR SPECIFIC APPLICATION.