



## CPN-SS



Anti-static food hose and pharmaceutical hose. Clear Polyurethane hose wall with stainless steel internal helix.

LENGTHS	SIZES	COLORS	TEMPATURE RANGE
25'	2" TO 20"	CLEAR / OPAQUE	-40°F TO 195°F

### APPLICATIONS

- flexible hose/ ducting for gases and for abrasive dust, powder, fibers
- food industry, pharmaceutical industry: food, pharmaceutical
- conveying of dry foods e.g. rice, cereals, sugar, milk powder, powders, coffee, tea, grains, flour, frozen foods
- mixer, dryer, packaging machine, bulk-bag (big bag)-charging and discharging, mill
- extraction arm
- explosion hazard area

I.D. IN / MM	O.D. IN	POSITIVE PRESSURE PSI	NEGATIVE PRESSURE INHG	BENDING RADIUS IN	WEIGHT LBS./FT
2 / 50-51	2.28	11.80	8.12	1.30	0.255
3 / 75-76	3.27	7.90	4.61	1.79	0.370
4 / 100-102	4.25	5.95	3.54	2.28	0.464
5 / 125-127	5.24	4.80	2.30	2.78	0.571
6 / 150-152	6.22	4.00	1.86	3.27	0.679
7 / 178-180	7.40	3.10	1.24	3.86	0.806
8 / 200-203	8.19	2.95	1.24	4.25	0.907
9 / 228-229	9.29	2.85	0.95	4.80	1.028
10 / 254	10.31	2.55	0.47	5.31	1.136
11 / 280	11.34	2.25	0.47	5.83	1.250
12 / 305	12.32	1.95	0.47	6.32	1.485
13 / 330	13.31	1.75	0.30	6.81	1.599
14 / 356	14.33	1.50	0.30	7.32	1.727
16 / 405-406	16.30	1.10	0.30	8.31	1.969
18 / 457	18.31	0.60	0.60	9.31	2.211
20 / 508	20.31	0.15	0.30	10.31	3.031

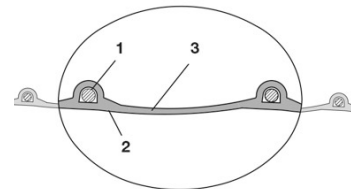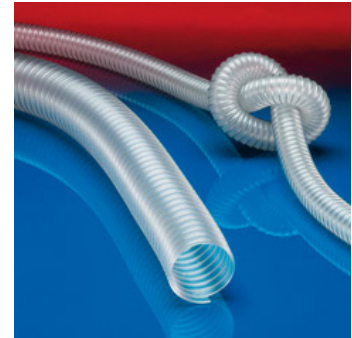

### PROFILE HOSE

- Spring steel wire integrated in the wall; spiral: stainless steel wire
- Wall: permanently antistatic premium ether-polyurethane
- Wall thickness 0.03 inch approx.

\* FURTHER DIAMETERS AND LENGTHS AVAILABLE ON REQUEST.



SCAN FOR PRODUCT INFORMATION

**DISCLAIMER:** THE DATA PROVIDED IS INTENDED AS A GUIDE ONLY AND SHOULD NOT BE INTERPRETED AS A WARRANTY. IT IS NOT INTENDED TO BE USED TO DETERMINE THE SUITABILITY OF THE PRODUCT FOR ANY SPECIFIC CUSTOMER APPLICATION. SIFTEX STRONGLY SUGGESTS THAT EACH CUSTOMER THOROUGHLY TEST THE PROSPECTIVE PRODUCT IN THEIR OWN MANUFACTURING FACILITY TO DETERMINE THE ACTUAL SUITABILITY OF THE PRODUCT IN THEIR SPECIFIC APPLICATION.

