




CR

Specially formulated clear static dissipative thermoplastic polyurethane hose reinforced with a rigid white external ABS helix and an embedded copper grounding wire.

LENGTHS	SIZES	COLORS	TEMPATURE RANGE
25', 50'	1" TO 8" *	CLEAR WITH WHITE HELIX(OTHER HELIX COLORS AVAILABLE)	-40° TO 200° F -40° TO 93° C

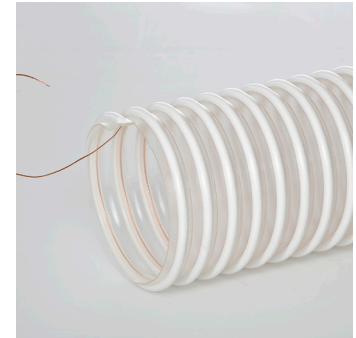

FDA ACCEPTABLE MATERIALS

APPLICATIONS

- Extremely flexible with great abrasion resistance vs. heavy walled PVC.
- Enclosed copper grounding wire reduces static build-up in material handling applications.
- Ideal for clean room and pharmaceutical applications, powder processing and pneumatic conveying systems.
- Smooth interior assures minimal friction loss, efficient air flow and elimination of material build-up.
- Permanent and non-humidity dependent ESD (electrostatic discharge) protection.
- Surface Resistivity level: 10⁸ - 10¹⁰ ohms/sq.
- Manufactured with FDA acceptable materials.
- Cuffs available
- Wall Thickness: .04

INSIDE DIAMETER (IN)	APPROX. WEIGHT (LBS/FT)	CL BEND RADIUS (IN)	COM-PRESSION RATIO	NEGATIVE PRESSURE (IN/HG)	WORKING PRESSURE (PSI)
1	.17	1.5	1:1	29	50
2	.3	2.5	1:1	29	50
3	.55	5.5	1.5:1	26	32
4	.75	6	1.5:1	22	30
5	1	7	1.5:1	18	28
6	1.25	7.75	1.5:1	12	26
7	1.5	10	1.5:1	11	25
8	1.75	12	1.5:1	10	24

* FURTHER DIAMETERS AND LENGTHS AVAILABLE ON REQUEST.



SCAN FOR PRODUCT INFORMATION

DISCLAIMER: THE DATA PROVIDED IS INTENDED AS A GUIDE ONLY AND SHOULD NOT BE INTERPRETED AS A WARRANTY. IT IS NOT INTENDED TO BE USED TO DETERMINE THE SUITABILITY OF THE PRODUCT FOR ANY SPECIFIC CUSTOMER APPLICATION. SIFTEX STRONGLY SUGGESTS THAT EACH CUSTOMER THOROUGHLY TEST THE PROSPECTIVE PRODUCT IN THEIR OWN MANUFACTURING FACILITY TO DETERMINE THE ACTUAL SUITABILITY OF THE PRODUCT IN THEIR SPECIFIC APPLICATION.

