




Sift-Socks™ Polyester Connectors

VINYL-COATED POLYESTER

- 18 oz Vinyl Coated Polyester is a strong heat sealable PVC material used to manufacture truck tarps, fumigation tarps, machinery covers, ball field covers and various industrial tarps
- Mildew and UV resistant.
- Used primarily for in our commercial bakery conveyor system Crumb-Catchers™ tarps.
- Innovative designs that are proven to make it easier for your crew to remove, clean and re-hang.

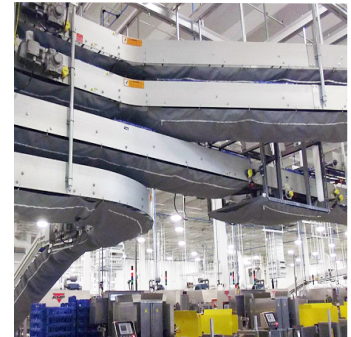

WEIGHT	FIBER CONTENT:	CONSTRUCTION	TEMPERATURE	COATING
18 OZ/SQ.YD	POLYESTER (1000 X 1300)	WOVEN (18 X 17)	0° TO 180° F CONTINUOUS, 225° F MAX -18° TO 82° C CONTINUOUS, 107° C MAX	POLY VINYL CHLORIDE

TECHNICAL DATA			
CHARACTERISTIC		TESTING METHOD	RESULTS
GRAB TENSILE	WARP FILL	ASTM D5034	371 LBS. 413 LBS.
STRIP TENSILE	WARP FILL	ASTM D5035	379 LBS. 366 LBS.
TONGUE TEAR	WARP FILL	ASTM D2261	90 LBS. 76 LBS.
ADHESION	ADHESIVE (1")	ASTM D751	12 LBS.
	HYDROSTATIC RESISTANCE	ASTM D751A	600 PSI
	LOW TEMPERATURE	ASTM D751	-30°F



◆ SCAN FOR
PRODUCT
INFORMATION

DISCLAIMER: THE DATA PROVIDED IS INTENDED AS A GUIDE ONLY AND SHOULD NOT BE INTERPRETED AS A WARRANTY. IT IS NOT INTENDED TO BE USED TO DETERMINE THE SUITABILITY OF THE PRODUCT FOR ANY SPECIFIC CUSTOMER APPLICATION. SIFTEX STRONGLY SUGGESTS THAT EACH CUSTOMER THOROUGHLY TEST THE PROSPECTIVE PRODUCT IN THEIR OWN MANUFACTURING FACILITY TO DETERMINE THE ACTUAL SUITABILITY OF THE PRODUCT IN THEIR SPECIFIC APPLICATION.

