



CPN-SD | CPN



Antistatic food hose and pharmaceutical hose, medium-heavy duty.

LENGTHS	SIZES	COLORS	TEMPERATURE RANGE
25', 50'	2" TO 20"*	CLEAR / OPAQUE	-40°F TO 195°F SHORT TIME TO 255°F

APPLICATIONS

- flexible hose/ ducting for abrasive powder, bulk material, granulate and for gases
- food industry, pharmaceutical industry: food, pharmaceutical
- conveying of dry foods e.g. rice, cereals, sugar, milk powder, powders, coffee, tea, grains, flour, frozen foods
- mixer, dryer, packaging machine, bulk-bag (big bag)-charging and discharging, mill
- explosion hazard area
- clean room ventilation, semiconductor production machine
- paper mill, paper and pulp industry: waste wa- ter, air extraction
- medical device/ medical technology, health-care sector: cable protection conduit, air supply hose, extraction hose

I.D. IN / MM	O.D. IN	POSITIVE PRESSURE PSI	NEGATIVE PRESSURE INHG	BENDING RADIUS IN	WEIGHT LBS./FT
2 / 50-51	2.24	19.60	12.85	1.50	0.270
3 / 75-76	3.20	13.20	6.50	2.07	0.395
4 / 100-102	4.21	10.00	3.40	2.68	0.540
5 / 125-127	5.20	8.00	2.35	3.25	0.660
6 / 150-152	6.18	6.60	2.20	3.86	0.940
7 / 178-180	7.36	5.10	1.50	4.57	1.120
8 / 200-203	8.15	4.55	1.50	5.04	1.250
9 / 228-229	9.45	3.60	0.90	5.83	1.425
10 / 254	10.28	3.40	0.60	6.30	1.580
11 / 280	11.30	3.05	0.60	6.93	1.740
12 / 305	12.28	2.85	0.55	7.50	1.890

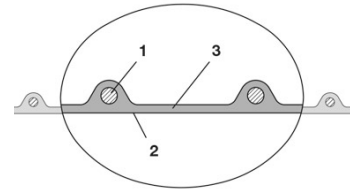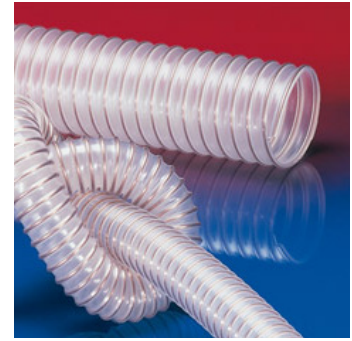

PROFILE HOSE

- Spring steel wire firmly embedded in the wall
- Wall: permanently antistatic premium ether-polyurethane
- Wall thickness 0.03 inch approx.

* FURTHER DIAMETERS AND LENGTHS AVAILABLE ON REQUEST.



SCAN FOR PRODUCT INFORMATION

DISCLAIMER: THE DATA PROVIDED IS INTENDED AS A GUIDE ONLY AND SHOULD NOT BE INTERPRETED AS A WARRANTY. IT IS NOT INTENDED TO BE USED TO DETERMINE THE SUITABILITY OF THE PRODUCT FOR ANY SPECIFIC CUSTOMER APPLICATION. SIFTEX STRONGLY SUGGESTS THAT EACH CUSTOMER THOROUGHLY TEST THE PROSPECTIVE PRODUCT IN THEIR OWN MANUFACTURING FACILITY TO DETERMINE THE ACTUAL SUITABILITY OF THE PRODUCT IN THEIR SPECIFIC APPLICATION.

